

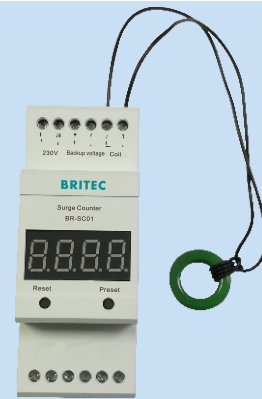


BRSC-01 Surge Counter

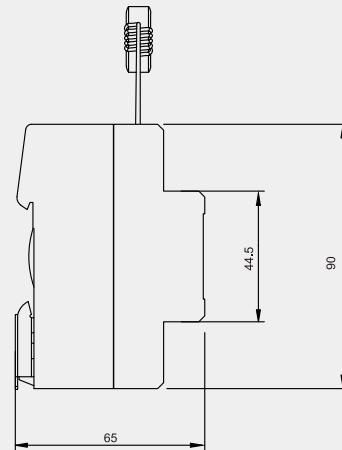

Count and record the times of surge current. Automatic memorize the result, the result will not be erased in case of power loss. Can be connected with computers by RS485 output.

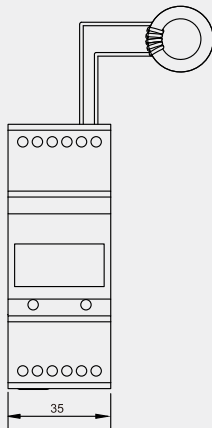

		BRSC-01
Response of impulse current		1kA
Surge counter main voltage	Un	230V~
Surge backup voltage		5-12V
Input signal		PE wire through the hole of the coil
Additional Input signal		2 of switch value
Output signal		Rs485
Count range		0~9999
Mounting		35mm Din Rail
Operating temperature range	Tu	-20°C...+60°C
Enclosure material		Thermoplastic
Degree of protection		IP20
Order Code		B6301