





BR-30FU 1+1

Type 2 Surge Arrester

Backup fuse built inside the SPD

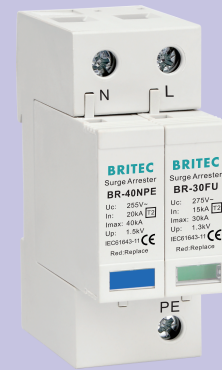

BR-30FU 1+1 surge arrester is suitable for single phase TT and TN system. No backup fuse or breakers needed.

	BR-30FU 150 1+1	BR-30FU 275 1+1	BR-30FU 320 1+1	BR-30FU 385 1+1	BR-30FU 440 1+1
SPD classification according to EN61643-11	Type 2	Type 2	Type 2	Type 2	Type 2
SPD classification according to IEC61643-11	Class II	Class II	Class II	Class II	Class II
Max. continuous operating a.c. voltage [L-N] U _c	150V	275V	320V	385V	440V
Max. continuous operating a.c. voltage [N-PE] U _c	255V	255V	255V	255V	255V
Nominal discharge current (8/20μs) _[L-N/N-PE] I _n	15kA/20kA	15kA/20kA	15kA/20kA	15kA/20kA	15kA/20kA
Max. discharge current (8/20μs) _[L-N/N-PE] I _{max}	30kA/40kA	30kA/40kA	30kA/40kA	30kA/40kA	30kA/40kA
Voltage protection level [L-N] U _p	≤0.8kV	≤1.3kV	≤1.5kV	≤1.8kV	≤2.0kV
Voltage protection level 5kA [L-N] U _p	≤0.6kV	≤1kV	≤1.2kV	≤1.3kV	≤1.5kV
Voltage protection level [N-PE] U _p	≤1.5kV	≤1.5kV	≤1.5kV	≤1.5kV	≤1.5kV
Short-circuit withstand capacity I _{SCCR}	25kA	25kA	25kA	25kA	25kA
Temporary overvoltage TOV-withstand [L-N] U _T	180V/5sec.	335V/5sec.	400V/5sec.	500V/5sec.	580V/5sec.
Temporary overvoltage TOV-safe failure [L-N] U _T	230V/120min.	440V/120min.	520V/120min.	650V/120min.	765V/120min.
Temporary overvoltage TOV-withstand [N-PE] U _T	1200V/200ms	1200V/200ms	1200V/200ms	1200V/200ms	1200V/200ms
Follow current extinguishing capability a.c. [N-PE] I _{fi}	100Arms	100Arms	100Arms	100Arms	100Arms
Leakage current I _{PE}	None	None	None	None	None
Response time [L-N] t _A	≤25ns	≤25ns	≤25ns	≤25ns	≤25ns
Response time [N-PE] t _A	≤100ns	≤100ns	≤100ns	≤100ns	≤100ns
Operating temperature range T _u	-40°C-80°C	-40°C-80°C	-40°C-80°C	-40°C-80°C	-40°C-80°C
Operating state/fault indication	green/red	green/red	green/red	green/red	green/red
Cross-section area (Min.)	4 mm ²	4 mm ²	4 mm ²	4 mm ²	4 mm ²
Cross-section area (Max.)	35mm ²	35mm ²	35mm ²	35mm ²	35mm ²
For mounting on	35mm Din rail				
Enclosure material	Thermoplastic UL94-V0				
Degree of protection	IP20	IP20	IP20	IP20	IP20
Order Code	B16108	B16120	B16132	B16144	B16156
Order Code (With remote signaling)	B16109	B16121	B16133	B16145	B16157