
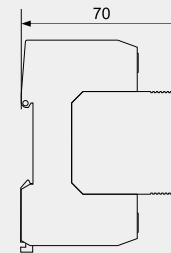




BR-80 2P

Type 2 Surge Arrester

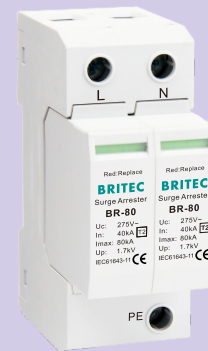

■ BR-80 2 pole surge arrester is suitable for TN-S system.

	BR-80 150 2P	BR-80 275 2P	BR-80 320 2P	BR-80 385 2P	
SPD classification according to EN61643-11	Type 2	Type 2	Type 2	Type 2	
SPD classification according to IEC61643-11	Class II	Class II	Class II	Class II	
Max. continuous operating a.c. voltage	Uc	150V	275V	320V	385V
Nominal discharge current (8/20μs)	In	40kA	40kA	40kA	40kA
Max. discharge current (8/20μs)	Imax	80kA	80kA	80kA	80kA
Voltage protection level	Up	≤1.0kV	≤1.7kV	≤2.0kV	≤2.3kV
Voltage protection level 5kA	Up	≤0.5kV	≤0.9kV	≤1.1kV	≤1.3kV
Max. backup fuse		200A gG	200A gG	200A gG	200A gG
Short-circuit withstand capacity	ISCCR	25kA	25kA	25kA	25kA
Temporary overvoltage TOV-withstand	UT	175V/5sec.	335V/5sec.	350V/5sec.	550V/5sec.
Temporary overvoltage TOV-safe failure	UT	250V/120min.	440V/120min.	550V/120min.	660V/120min.
Leakage current	IPE	<0.1mA	<0.1mA	<0.1mA	<0.1mA
Response time	tA	≤25ns	≤25ns	≤25ns	≤25ns
Operating temperature range	Tu	-40°C-80°C	-40°C-80°C	-40°C-80°C	-40°C-80°C
Operating state/fault indication		green/red	green/red	green/red	green/red
Cross-section area (Min.)		4 mm ²	4 mm ²	4 mm ²	4 mm ²
Cross-section area (Max.)		35mm ²	35mm ²	35mm ²	35mm ²
For mounting on	35mm Din rail				
Enclosure material	Thermoplastic UL94-V0				
Degree of protection	IP20	IP20	IP20	IP20	
Order Code	B18276	B18278	B18280	B18282	
Order Code (With remote signaling)	B18277	B18279	B18281	B18283	